



Introduction to Our Products

Your Trusted Source for Stainless Steel Solutions

INOXFLEX

Introduction

We are one of the professionally managed unit for manufacturing of Stainless Steel Flexible Hose, Braiding & Hose Assemblies & Hoses Fittings. A large variety of Stainless Steel Flexible Hoses & Hose Assemblies, manufacture in austenitic steel are, AISI 321, 316, 316L, 304 grades conforming to international quality standards.





HOSES

Stainless Steel corrugated flexible hoses are offered from 1/4"NB to 10" NB .



BRAID

The braid is normally manufactured in SS 304 wire. However SS 316 braid can also be manufactured. We also supply wire braid in different configurations as per customer specifications

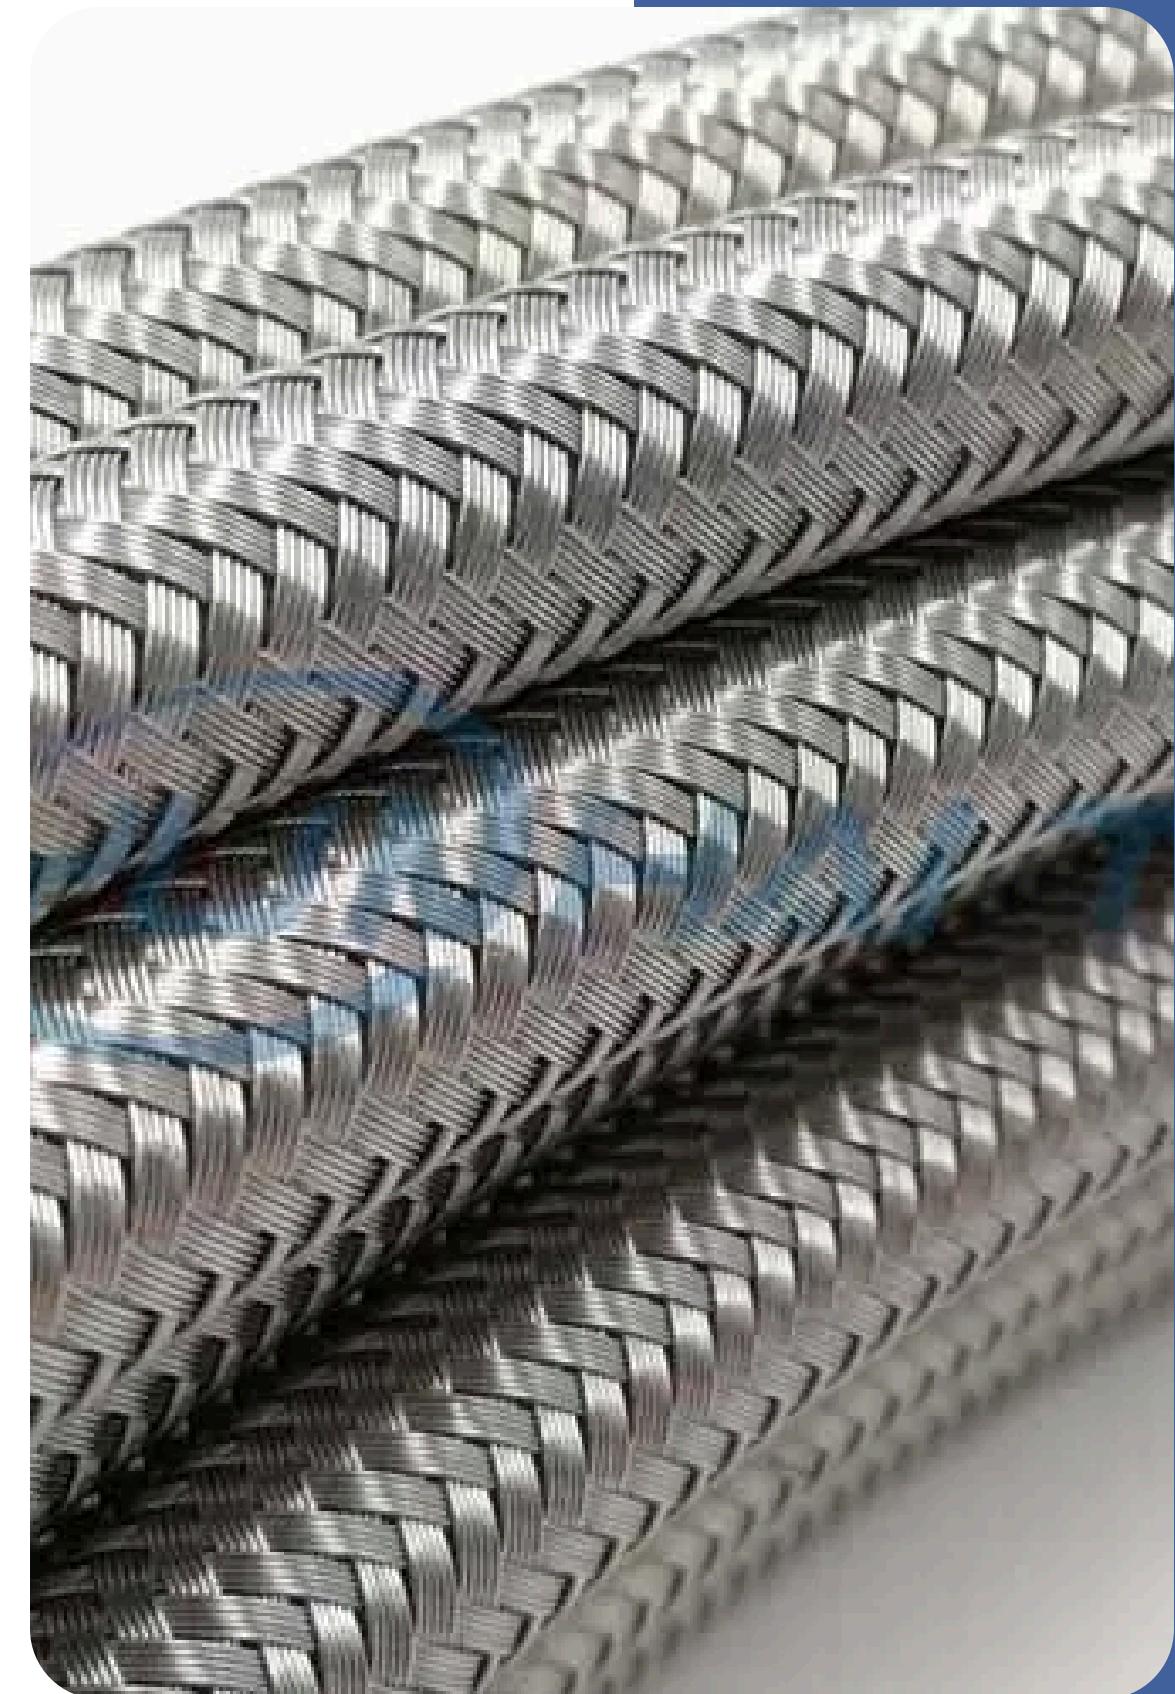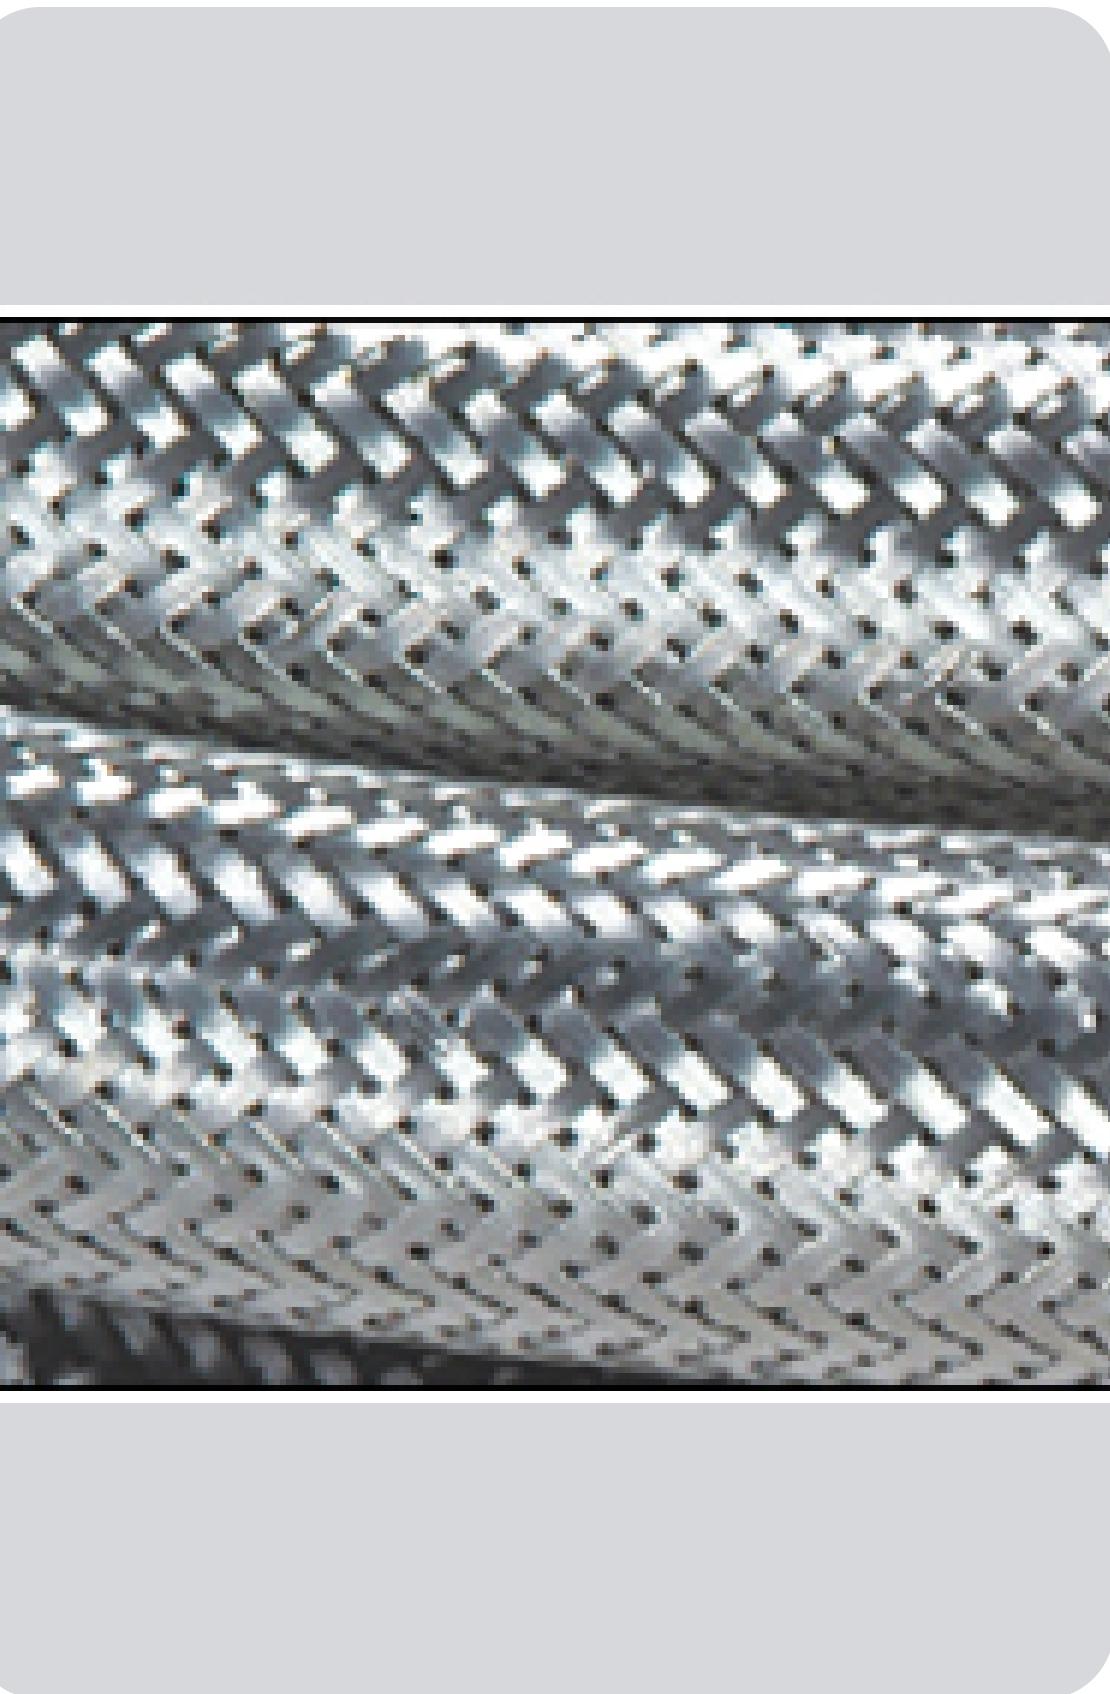

ASSEMBLIES & WELDING

Our Hose assemblies are engineered to perfection in flexibility, strength and reliability. We can provide a corrugated stainless steel hose assembly that will meet your most demanding technical specification. The end connections are TIG welded to hose. Hose assemblies can be supplied as per customer design and specifications.




Hose Technical Data

Note :

1. The above Technical details are subject to change without notice.
2. We can also supply the above Hoses for higher pressures.
3. The above values apply only to Braided Hoses and Assemblies at ambient temperature.

Nominal Size (mm)	N.B.	Without Braid Pressure		With Double Braid Pressure		Min. Bend Radius (mm)
		Max. Working (Design)	Test	Max. Working (Design)	Test	
6	4	6	100	150	160	
10	4	6	90	135	144	
12	3	4.5	80	120	128	
16	3	4.5	70	105	112	
20	2	3	64	96	102	
25	2	3	50	75	80	
32	1.5	2.3	40	60	64	
40	1.5	2.3	30	45	48	
50	1	1.5	28	42	44	
65	1	1.5	24	36	38	
80	1	1.5	18	27	28	
100	0.8	1.2	16	24	26	
125	0.6	0.9	12	18	20	
150	0.6	0.9	10	15	16	
200	0.5	0.75	8	12	12	

VARIOUS TYPES OF END CONNECTIONS

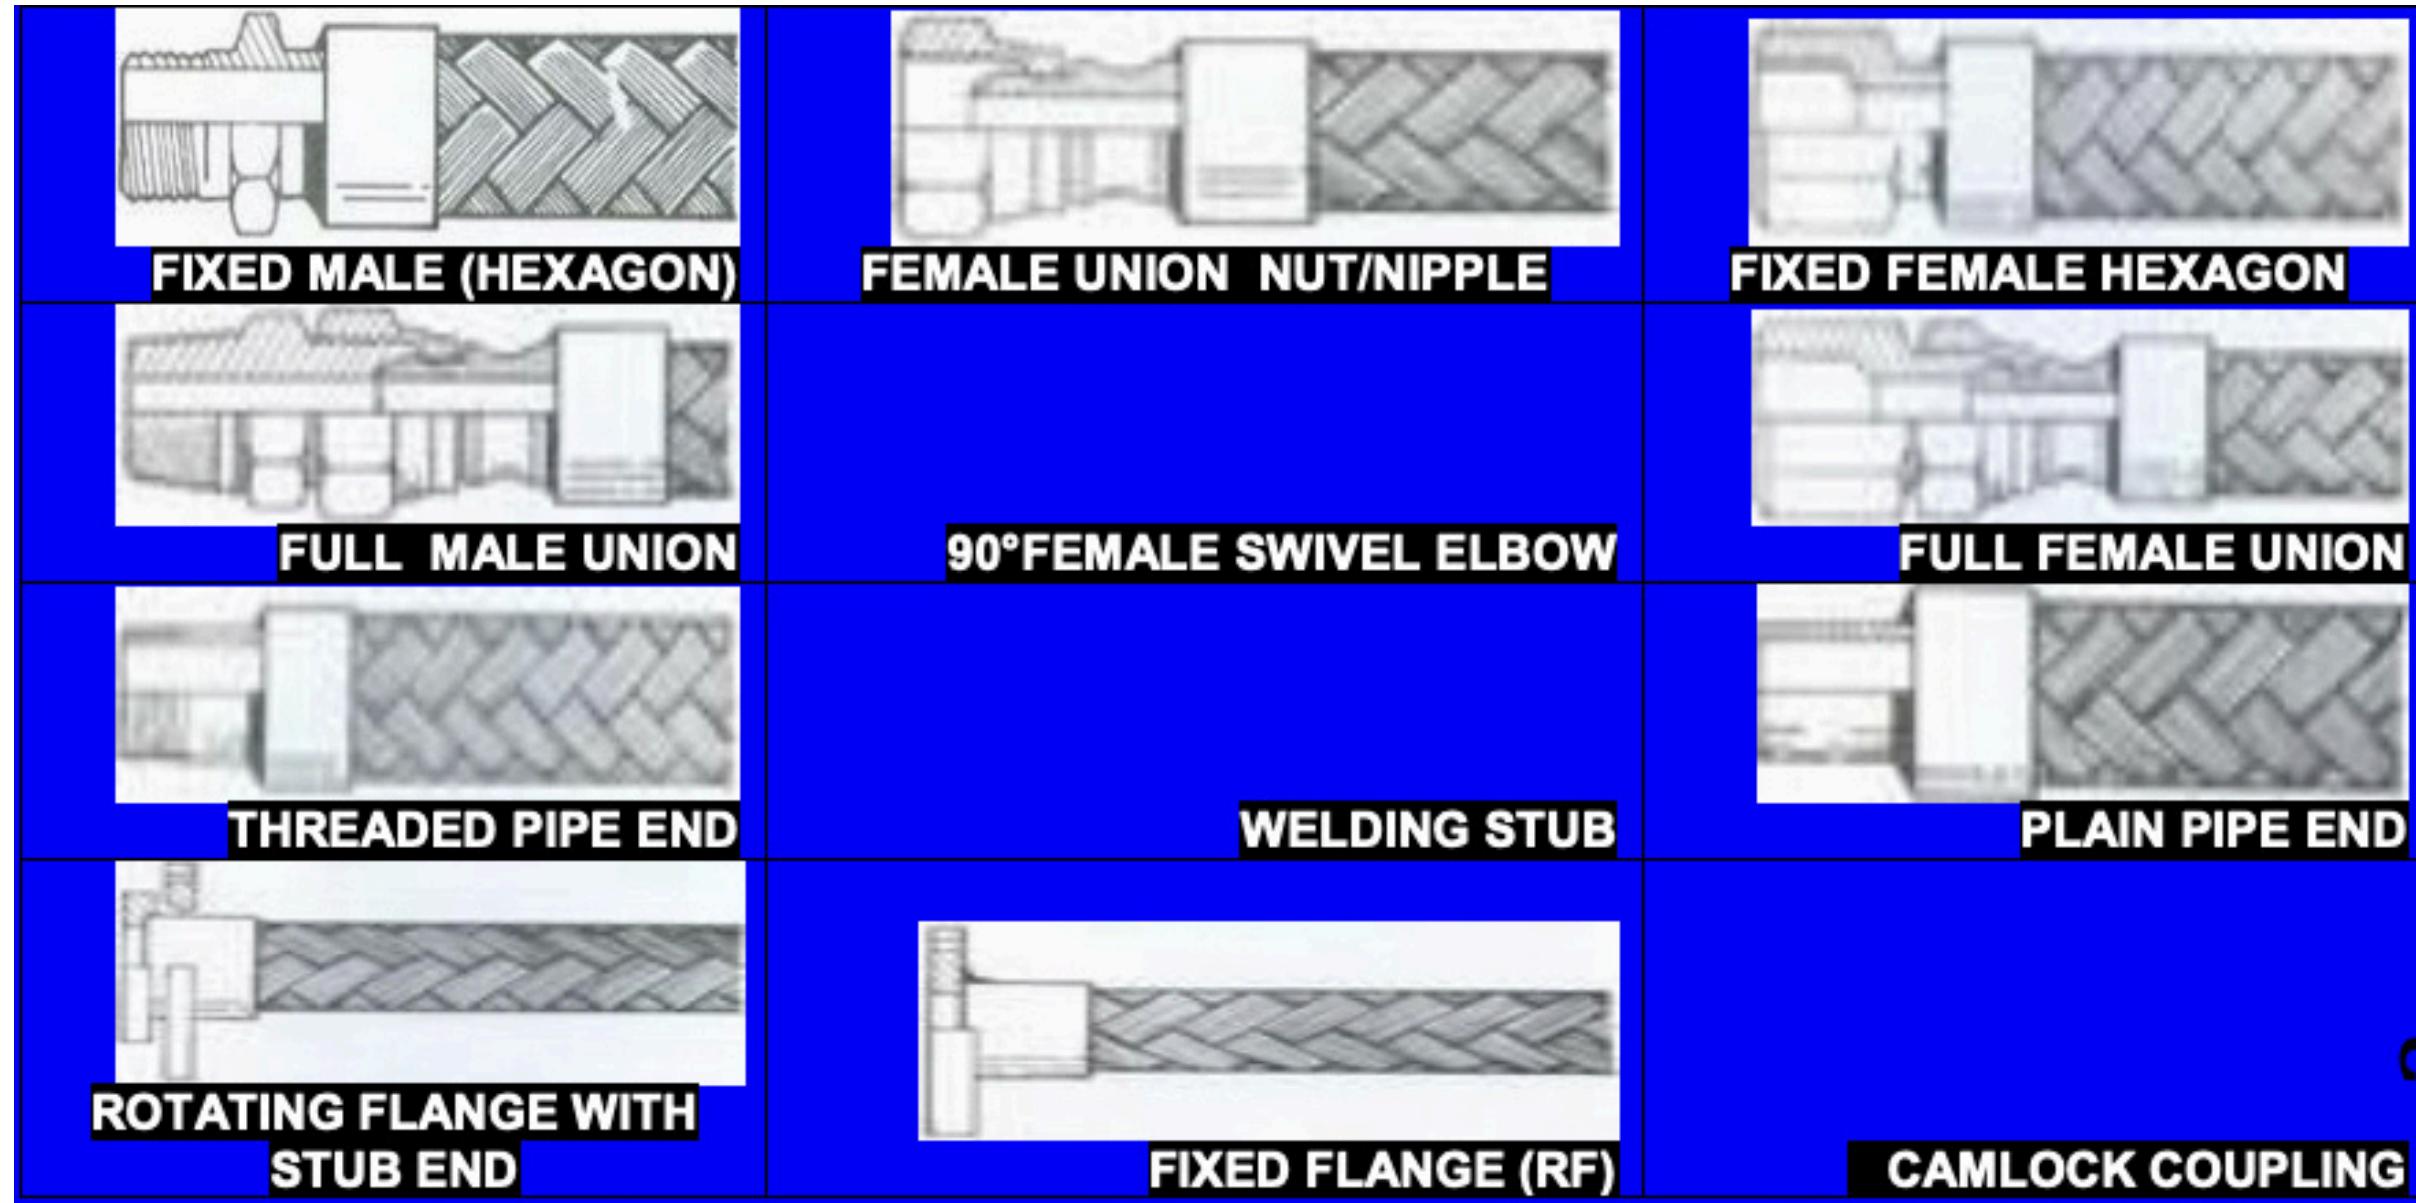

Strip Wound Interlock Hoses

Interlocked metal hose is also referred to as strip wound hose and consists of successive turns of profiled strip, with the edges of adjacent turns interlocked. Interlock Hoses are made with a packing so that filament of cotton, asbestos, rubber or metals like copper can be fed into the interlock to make it pressure tight. It is mostly used as a protective/conduit casing. It is also used as a liner inside the hose based on the profile formation.

Locking methods are called :-


- » **Square lock**
- » **Square lock with packing**
- » **Double lock**
- » **Double lock with packing**



Double Interlock Hoses



Square lock with out packing

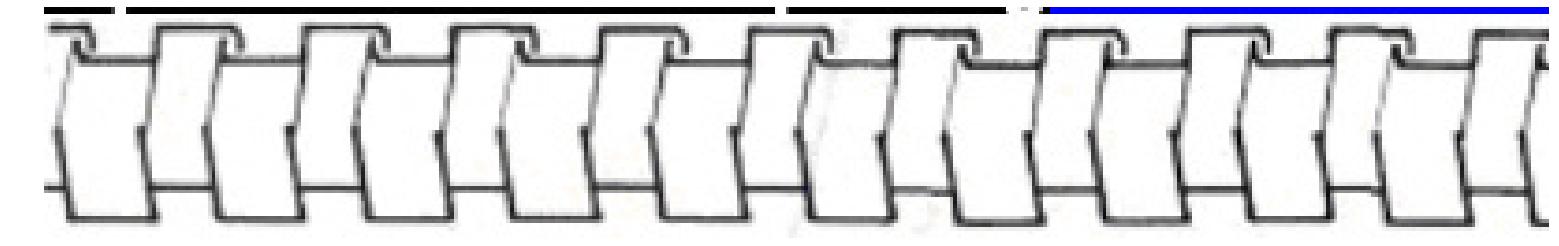

Applications:-

- » As armour
- » For telephone & electrical cables
- » Control instruments & thermo couples
- » For conveying non penetrating fluids such as tar, naptha, furnace oil

Product Specification

S. No.	Size ID (mm)	OD (mm)	Min. Bend Radius (mm)
1	28	32	150
2	30	34	155
3	32	36	170
4	35	39	185
5	40	45	210
6	45	50	255
7	50	55	255
8	55	60	265
9	60	66	275
10	75	82	325
11	80	88	330
12	85	92	340
13	90	98	350
14	100	106	475
15	150	162	650

QUALITY

We have complete in-house testing facilities for various types of tests, as per international standards for our range of supplies. Every single hose-assembly is tested hydraulically at 1.5 times working pressure before dispatching. Pneumatic testing is also carried out whenever necessary. All raw material used in the manufacture of hoses, braiding and end-connections undergo inspection by trained & experienced engineers to ensure highest quality standards.

TESTING & CERTIFICATION

All unbraided Hoses are subjected to leak detection test using compressed air. All assemblies are checked for dimensional accuracy and pressure tested. Test certificates for pressure tests carried out will be provided. Test stipulated by BS 6501: Part-1 are conducted periodically. Raw material test certificates showing the physical and comical properties will be furnished on request.

QUALITY

1. High physical strength combined with light weight
2. Suitable for wide temperature range (-270° C to + 700° C).
3. Good corrosion resistance. Resistance to fire, moisture, abrasion and penetration.
4. Absorbs vibration and noise from pumps, compressors, engines etc.
5. Compensates for intermittent or constant movement.
6. Compensates for thermal expansion of contraction of piping.
7. Corrects problems of misalignment.
8. A flexible and quick alternative for piping in difficult locations.



Contact Information

Quality Manufacturing and Export

Phone

[+91 88149 05509](tel:+918814905509)

Email

inoxflex10@gmail.com

Website

inoxflex.co.in

Address

417/21, Nehru Park, Old DSP Street, Bahadurgarh